

Qulbix®

CAT. 17: Crank set with 30-12-30T Overdrive (5,6,3)

Crank lengths: 120 mm and 170 mm


Fits only 100 mm BB shell width!

CAT.C17: CRANKS, FOOTPEGS, KICKSTAND CRANK SET 120mm, 30-12-30T OVERDRIVE, PAS

FITS 100mm BOTTOM BRACKET SHELL WITH Bicycle
(English) thread, Pitch: 24turns/inch, d=34,8mm

DOES NOT FIT Q140MD/Q144/Q144i MODELS!

QULBIX®

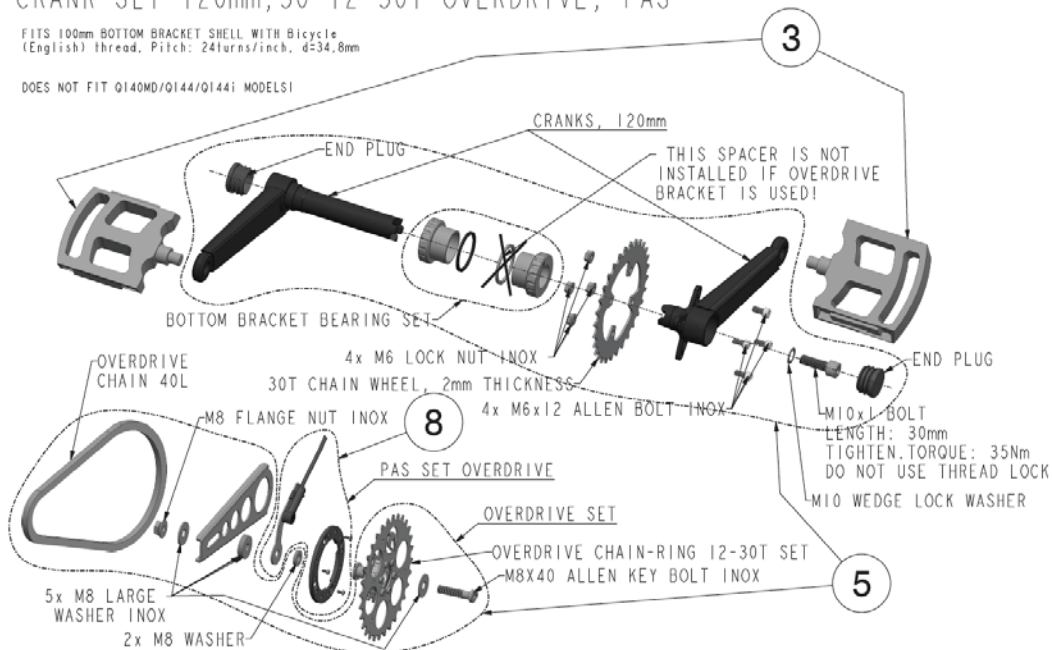


CAT.C17: CRANKS, FOOTPEGS, KICKSTAND CRANK SET 170mm, 30-12-30T OVERDRIVE, PAS

FITS 100mm BOTTOM BRACKET SHELL WITH Bicycle
(English) thread, Pitch: 24turns/inch, d=34,8mm

DOES NOT FIT Q140MD/Q144/Q144i MODELS!

QULBIX®

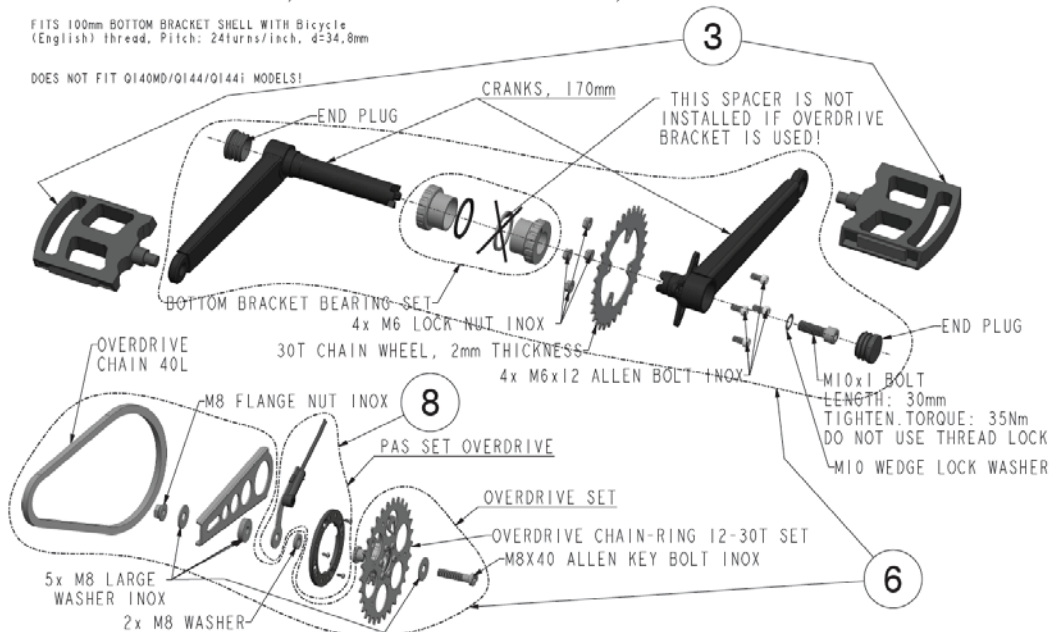

(11):



Overdrive bracket on right side. Spacer (1x) only on left side!



Align parallel $\pm 3^\circ$.



Tighten firmly – to prevent bracket movement.








35 Nm





Apply grease inside (on both sides).



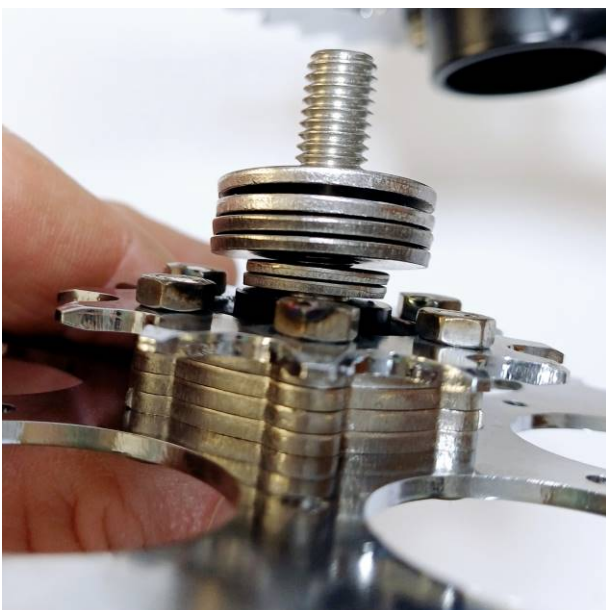

2 x M8 washer, 4 x M8 large washer. You can add more or less to adjust offset.

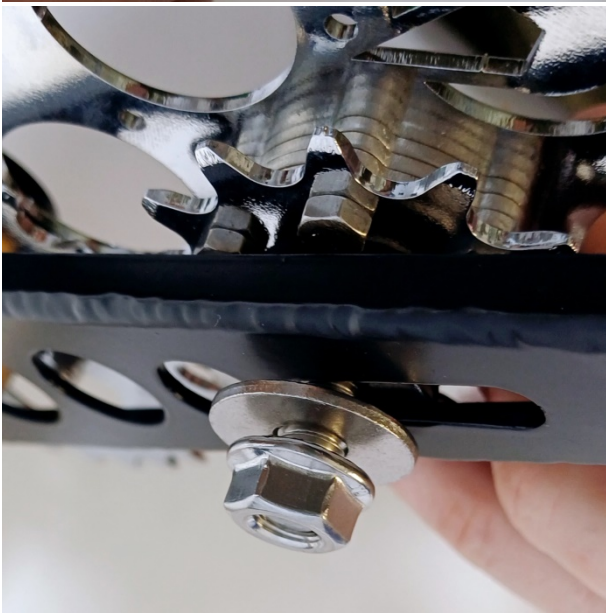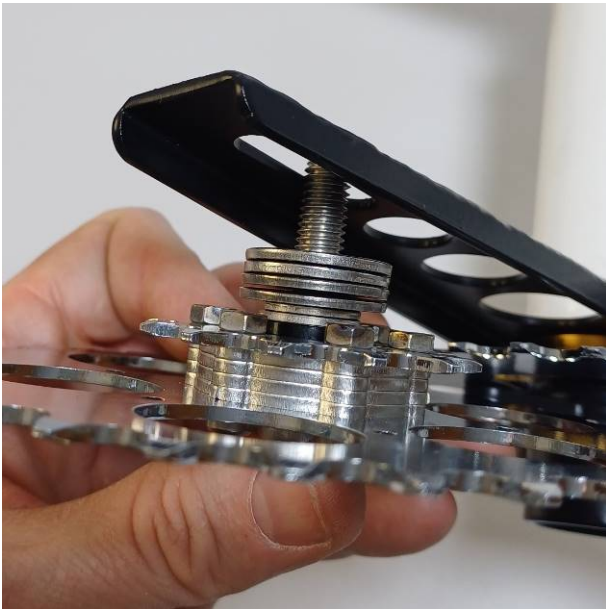

Tighten so the chain can move freely, but not too loose.



Chain-line: 66 mm. Can be adjusted with the use of more or less spacers.



Q-factor: $2 \times 115 = 230$ mm (the same for 120 and 170

cranks).

(3):

